



User Manual for Reference Studio 4K Fixed Frame Screens


To the Owner

Thank you for purchasing our Reference 4K line of fixed frame screens, using our excellent screen materials and design, to give you years of trouble free enjoyment. Please take a moment to read the user manual before installation to avoid any potential issues.

Installation Notes

1. Assembly requires two people and open floor space greater than the size of the screen
2. Screen material is sensitive to rapid temperature changes, please let material warm up to room temperature before installation
2. Make sure the workspace is clean and free of debris
3. Keep screen fabric away from high temperatures to avoid permanent material deformation

Parts List



Hanging
screw



L joiner



Material
tensioner



Hanging
bracket



L joiner
screw



L joiner
washer



Metal Rods,
2 long, 2 short



Screen
Material



Frame Rails, 2 long, 2 short

Tools Required

1. Philips Screwdriver
2. Level for hanging the screen

2

Installation Procedure

1. Unpack the screen and check that all parts are present
2. Have two people present to assemble and install the screen
3. Assembly requires a clean area of approximately 2 feet of extra space added to the dimensions of assembled screen on each side
4. Unwrap screen rails, then lay screen rails out, upside down
5. Put the Material tensioners into the frame according to the arrow which marks their spot (see below)



6. Slide the L bracket into the ends of the two shorter frame pieces



3


7. Connect the short frame with the long frames, as shown below



8. Slide the hanging brackets into place as shown in the picture below



9. Slide all frames together, as shown on the next page. Make sure to place the L bracket screws with the L bracket washer. The picture does not show the placement of the washers, but the washers are highly recommended.

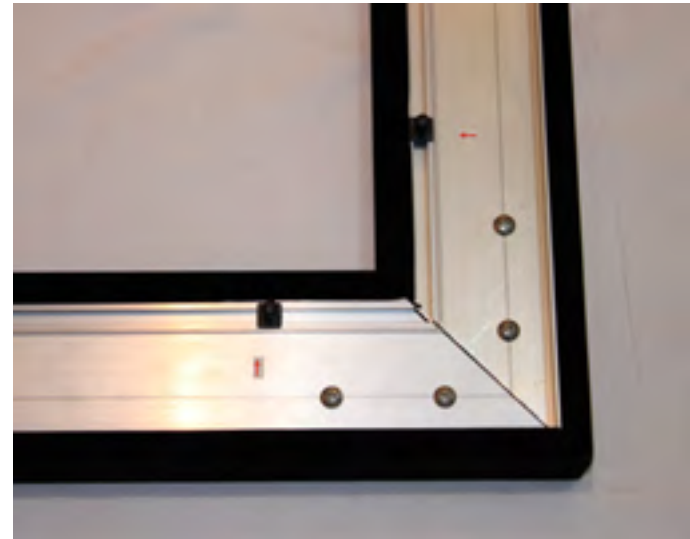

10. Unroll the screen material and gently place it on the ground, viewing side down. Make sure the ground is clear of debris and dirt.

11. Thread the metal rods into each pocket that's at the corners of the material. Place the two shorter rods at the shorter side of the screen material and place the longer rods at the longer side of the screen material.



12. Place the material over the back of the frame and begin to tension the material. Start at one end of the screen and move along the frame as every material tensioner is inserted into the proper slot on the side of the material. The last few tensioners may require hard pulling, this is normal to keep the screen perfectly flat.



13. Lift up the screen.

ATTENTION: WHEN LIFTING SCREEN OFF THE FLOOR, USE 2 PEOPLE TO HOLD BOTH SIDES OF SCREEN AND GENTLY TILT THE SCREEN UPRIGHT.

14. Use a level and mark down the locations to put down the hanging screws. Hang the screen from the wall at your desired location

Visit our website the latest information on our products
www.EluneVision.com